


Other

Main Specifications

Speaker	30cm non-pressed cone type	Teal/Small Parameters	
Frequency Response	20–3,500 Hz	Fs.	24.6Hz
Impedance	2Ω + 2Ω	Qts.	0.45
Rated Input	200W	Vas.	120 n
Maximum Input	600W	Xmax.	6 mm
Sound Pressure Level	89dB/W/m	Mms	105 g
Mounting Hole Diameter	Ø285mm	Effective diaphragm diameter	254mm
Mounting Depth	120 mm		
Weight	Approx. 2.6 kg (1 unit)		
Accessories	Mounting hardware (complete set) Instruction manual (1) Sony Customer Support Information (1) Warranty Card (1)		


Dimensions

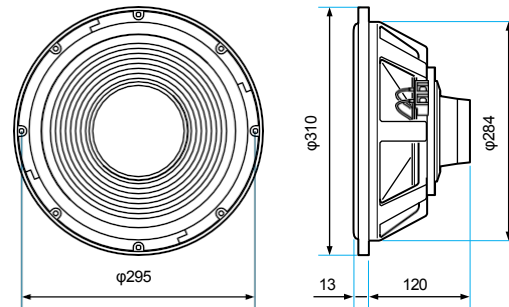

Unit: mm


Frequency Response Chart Sound Pressure
Output (Anechoic Chamber 1m.1W)

Sound Pressure Level (dB)

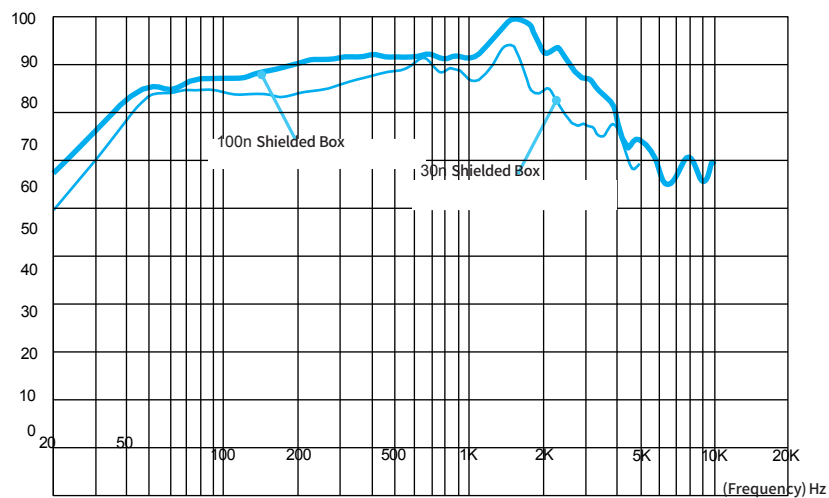


Recommended Subwoofer Box

Sealed Type




Internal Volume V
(n) 30-50

Port Type



Net Volume V (n)	Port Inner Diameter d (mm)	Length L (mm)
30	Ø 75	150
	Ø 100	250
40	Ø 75	100
	Ø 100	200
50	Ø 75	80
	Ø 100	150

Band Pass Type



Net Volume v ₁ (n)	v ₂ (n)	Port Inner Diameter d (mm)	Length L (mm)
15	15	Ø 100	150
25	15	Ø 100	150
35	20	Ø 100	150