


US 0720N04

120 Watt max | 4 Ω | Ø 72 mm / 2,5"

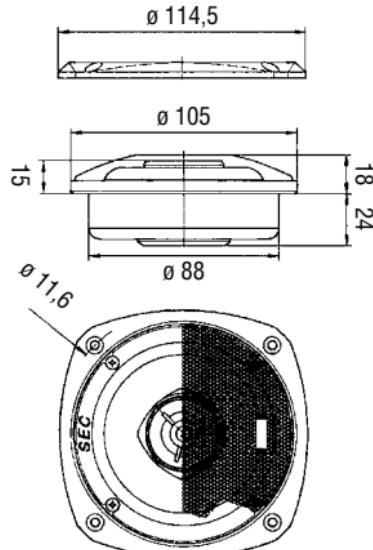

TWIN DRIVER

Membrana del Mid Range toroidale in tela e del Tweeter in seta
Toroid-fabric diaphragm for Mid Range and silk soft dome for Tweeter



	MID RANGE	TWEETER
Potenza nominale	80 W	40 W
Impedenza nominale	4 Ω	4 Ω
Sensibilità (1W/1m)	89 dB	90 dB
Ø bobina mobile	72 mm	20 mm
Altezza traferro	3 mm	1,5 mm
Fori di fissaggio	4 Ø 4,5 / Ø 116	-
Foro pannello	90 mm	-

	MID RANGE	TWEETER		MID RANGE	TWEETER
Re	3,2 Ω	3 Ω	D	-	-
Fs	500 Hz	1,5 kHz	Vas	-	-
Qms	-	-	BxI	3,4 Wb/m	1 Wb/m
Qes	-	-	Xmax	-	-
Qts	-	-	ηo	-	-
Mms	2,45 g	0,15 g	Le	0,073 mH	0,017 mH
Cms	-	-	Peso	0,85 Kg	-

